SCHLUMBERGER WELL SURVEYING CORPORATION

MICROLOGGING®

COUNTY BANNER
FIELD or BARRETT
LOCATION SEC. 33-17N-56W
WELL BARRETT #1-F

COMPANY PAN AMERICAN PETROLEUM CORP.

COMPANY PAN AMERICAN PETROLEUM CORP.
WELL BARRETT #1-F
FIELD BARRETT
LOCATION C NE SE
SEC. 33-17N-56W
COUNTY BANNER
STATE NEBRASKA

JUN 22 1968

Other Surveys: ES

Location of Well

Elevation: D.F. GL 4992 / KB 4992 / GL 4983.2

Log Depths Measured From: K.B. 8.8 ft. above G.L.

RUN No.	ONE
Date	1-4-69
First Reading	6780
Last Reading	6580
Feet Measured	200
Depth Reached	6781
Bit Size	7 7/8"
Mud Kind	CHEM-GEL
Mud Resist. Sec.	10
Mud Resist. Bht	1.9
Rm. Bht	172
Rmf	6
Rmc	5
Wtr. Loss	8
Rmf	6
Rmc	5
Wtr. Loss	8
Mud Log. Km	6
Depth	5520
Mud Log. Km	6
Depth	6620
Bit Size	7 7/8"
Sonde Type	PGS-R
Oper. Rig Time	7 HOURS
Truck No.	2504 KM
Witnessed By	BRETT MCGEL

FOLD HERE

REMARKS

MUD SAMPLE FROM FLOW LINE

MEASURED VALUES RMF-3.9 @ 70
RMC-3.7 @ 70

MICROCALIPER	DETAILS	RESISTIVITY ohms. m²/m	
6 7 8 9 10 11 12 13 14 15 16 Hole Diameter in Inches		0 Micro Inverse 1" x 1" 10	20
	L.R. 6400	0 Micro Normal 2" 10	20

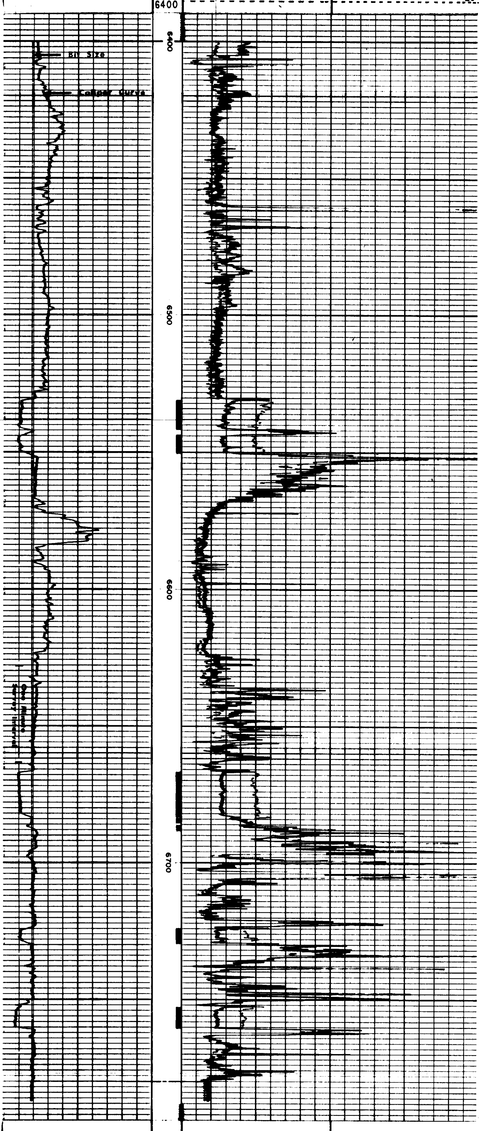

6 7 8 9 10 11 12 13 14 15 16 Hole Diameter in Inches	0 Micro Inverse 1" x 1" 10	20
	0 Micro Normal 2" 10	20
MICROCALIPER	RESISTIVITY ohms. m²/m	

COMPANY PAN AMERICAN PETROLEUM CORP.
WELL BARRETT #1-F
FIELD BARRETT
COUNTY BANNER STATE NEBRASKA

Rm	1.9	@ 172	°F
Rmf	6	@ 172	°F
Rmc	5	@ 172	°F
BHT		172	°F

SWSC FR 6780
SWSC TD 6781
DRLR TD 6782
Elev.:
KB 4992
DF
GL 4983.2

SURVEY WITH SONDE COLLAPSED

Apparent Rm 1.9 Ω m²/m
Depth 6620 ft.

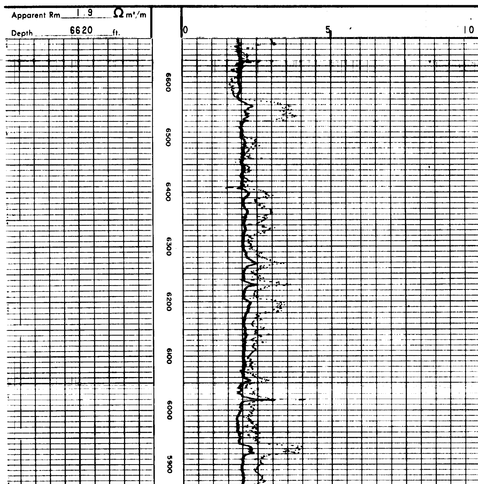

COMPANY: PAN AMERICAN PETR. CORP. LOCATION: C NE SE, SEC. 33-17N-56W
WELL: BARRETT #1-F COUNTY: BANNER STATE: NEBR.