FORM 841-B-REVISED-J. WALLACE

THIS FORM CONFORMS TO API RP 33

RADIOACTIVITY LOG

WELEX JET SERVICES, Inc.

FILE NO.

Location of Well	
	COMPANY PAN AMERICAN PETROLEUM CORP.
	WELL OSTGREN NO. 14
	FIELD OSTGREN
	COUNTY BANNER STATE NEBR.
	LOCATION SEC. 32 - 17N - 54W
	C - SW - NE

COMPANY PAN AMERICAN PETROLEUM CORP.
WELL OSTGREN NO. 14
FIELD OSTGREN
COUNTY BANNER STATE NEBR.
LOCATION SEC. 32 - 17N - 54W
C - SW - NE

JAN 2 1958

LOG MEAS. FROM 10' ABOVE 2" OUTLETS ELEV. 4838'
DRLG. MEAS. FROM ELEV.
PERM. DATUM GROUND LEVEL ELEV. 4828'

TYPE OF LOG	GAMMA RAY			
RUN NO.	1			
DATE	6-30-57			
JOB NO.	266-2501			
TOTAL DEPTH (DRILLER)	6140			
EFFECTIVE DEPTH (DRILLER)	6112			
TOTAL DEPTH (R. A LOG)	6119			
TOP OF LOGGED INTERVAL	[illegible]			
BOTTOM OF LOGGED INTERVAL	6117			
TYPE OF FLUID IN HOLE	OIL			
FLUID LEVEL	740			
MAXIMUM RECORDED TEMPERATURE	150° E.L.			
NEUTRON SOURCE STRENGTH & TYPE				
SOURCE SPACING—IN.				
DETECTOR CLASS	GM COUNTER			
DETECTOR TYPE	103			
LENGTH OF MEASURING DEVICE—IN.	7			
O.D. OF INSTRUMENT—IN.	2-5/8			
TIME CONSTANT—SECONDS	4.0			
LOGGING SPEED FT./MIN. 5"	18			
STATISTICAL VARIATION—IN.				
SENSITIVITY REFERENCE	G-933			
RECORDED BY	THOMPSON			
WITNESSED BY	MR. McMILLIAN			

CASING RECORD

SIZE—INS.	WT.—LB.	INTERVAL FROM WELL RECORD	INTERVAL FROM R/A LOG
8-5/8	29.35	SURF. To 527	To
4-1/2	11.60	SURF. To 6136	To
		To	To
		To	To

BORE HOLE

BIT SIZE INS.	INTERVAL FROM WELL RECORD	INTERVAL FROM R/A LOG
12-1/4	SURF To 527	To
7-7/8	527 To 6140	To
	To	To
	To	To

REMARKS OR OTHER DATA

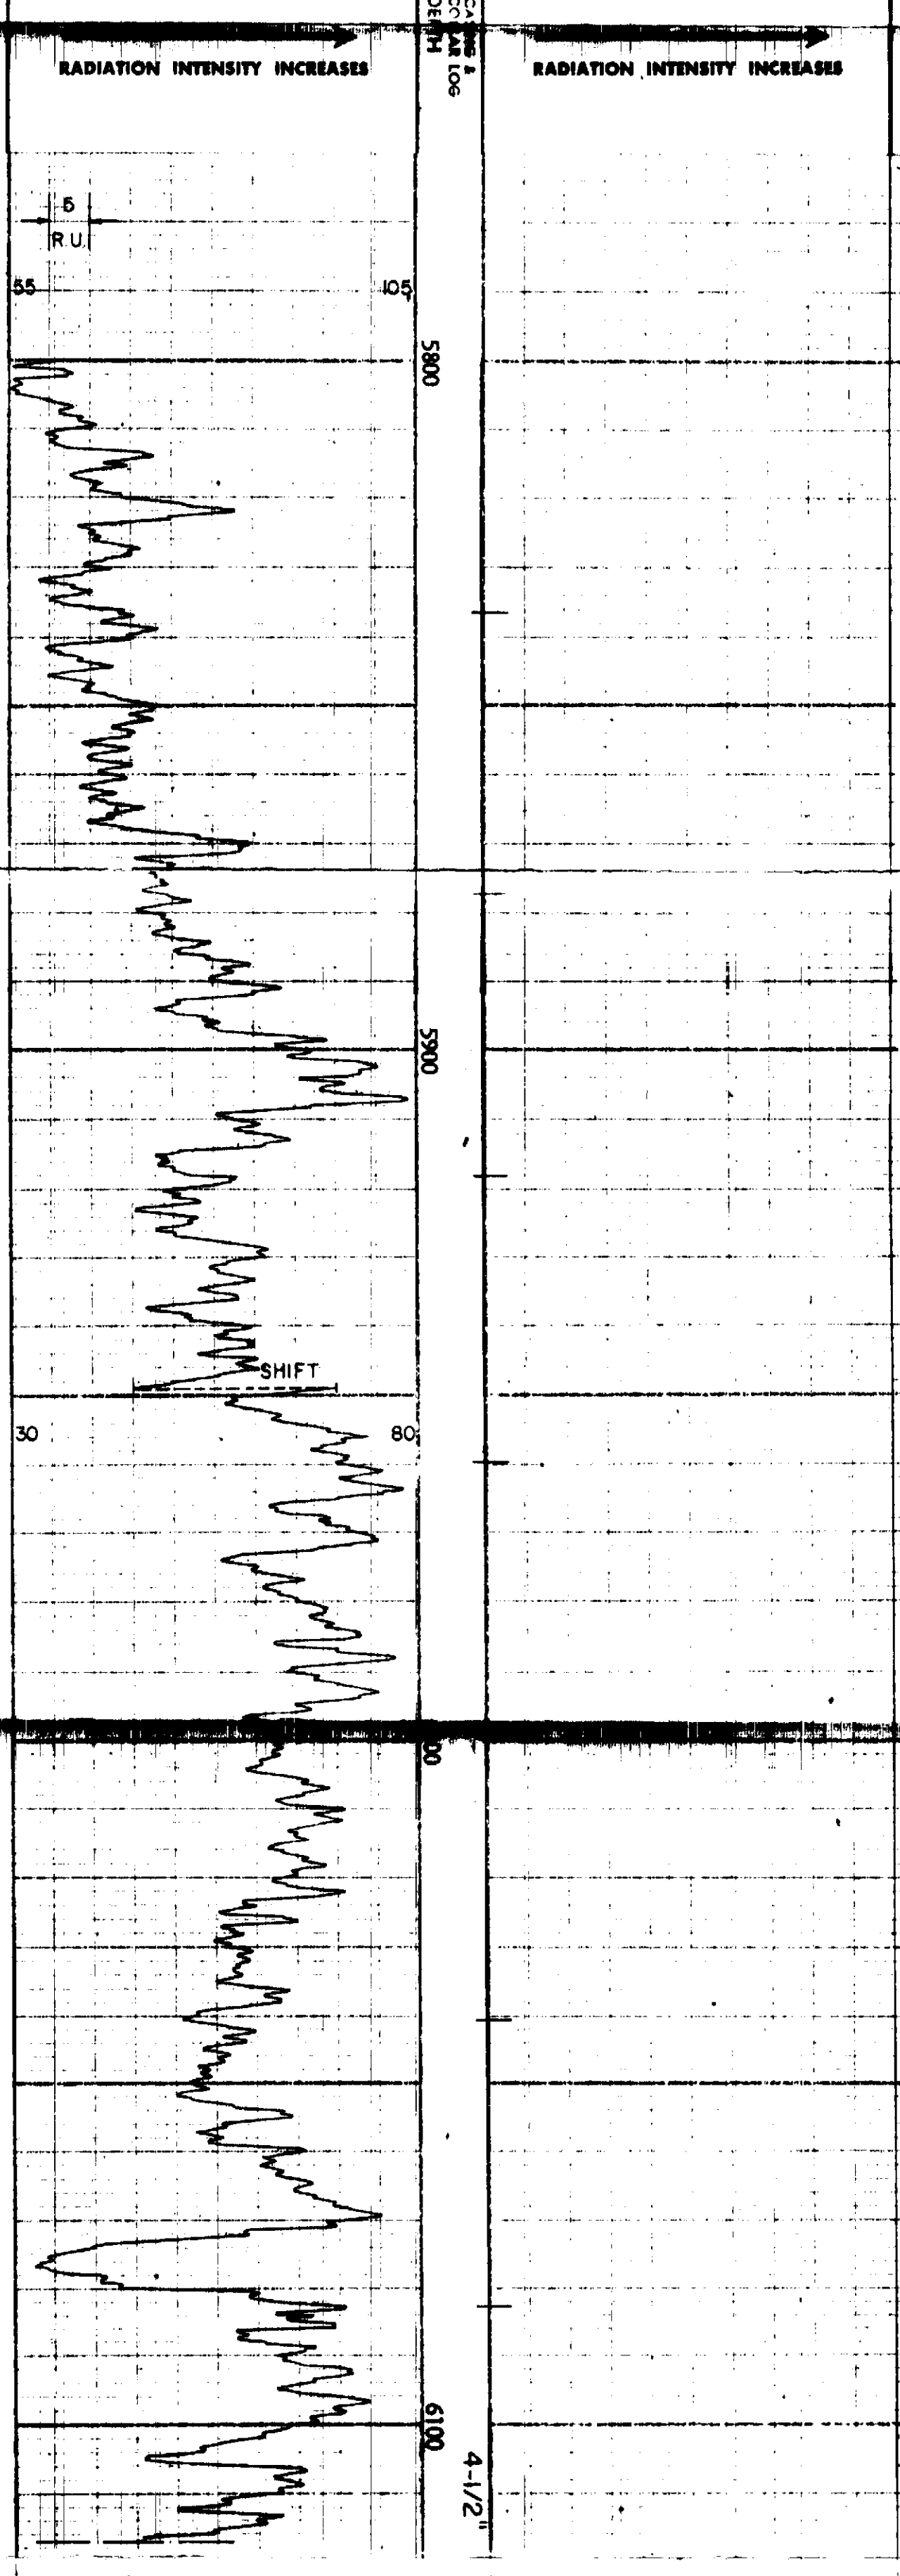

R.D. - 6117'
T.D. - 6119'
PAN AMERICAN PETROLEUM CORPORATION
OSTGREN NO. 14
OSTGREN FIELD